

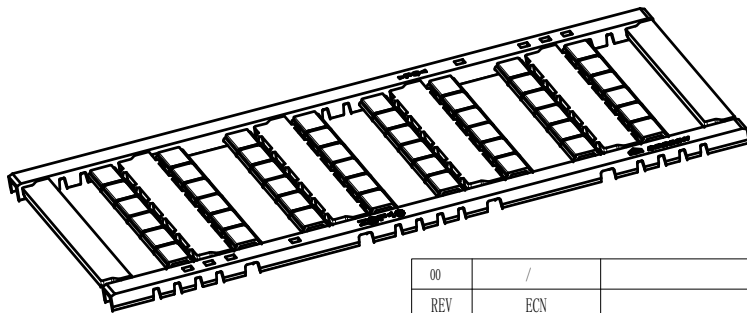


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by Degson. All rights reserved for patent. 除专利声明外，其他内容均受法律保护。未经许可，不得复制或传播。

未注公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'
间距/Pitch(mm) / 线数范围/Poles										10.2/N=48P				
使用温度范围/Operating temperature(°C)										-40~+110				
符合 RoHS 环保要求/Conform to RoHS										Yes				



00	/	/	Chen KZ	2022.06.09
REV	ECN	DESCRIPTION	DRFT	DATE

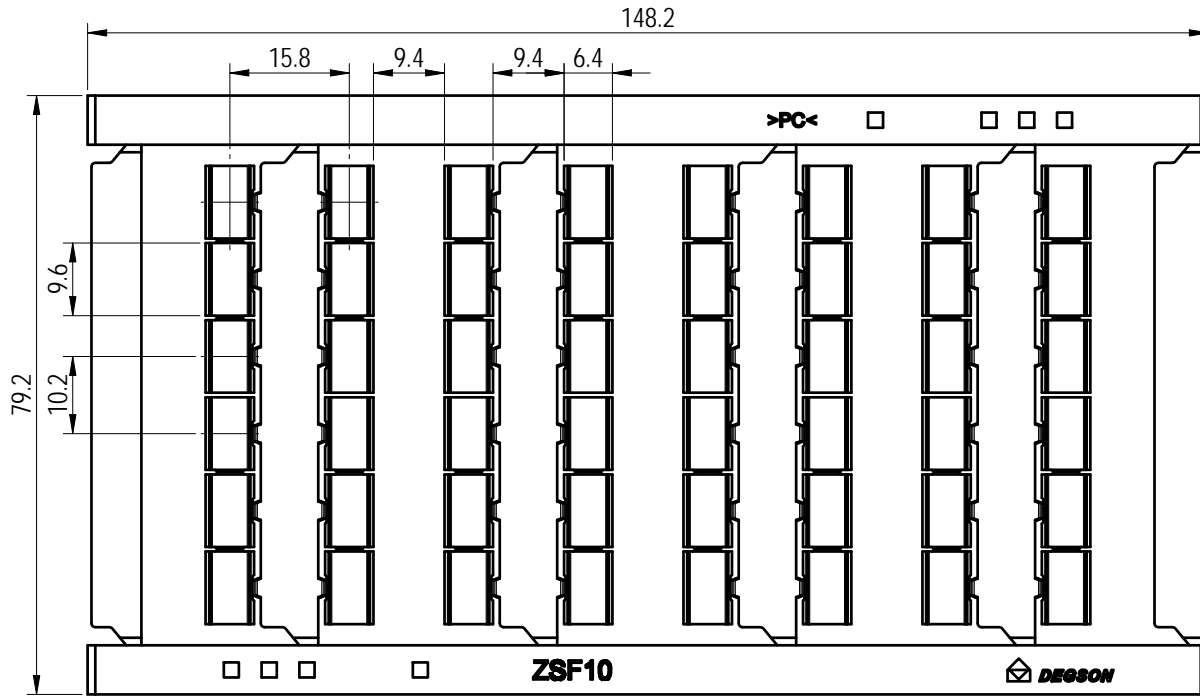

APPD:	Peng M	2022.06.09
CHKD:	Gao WG	2022.06.09
DRFT:	Chen KZ	2022.06.09

MATERIAL: PC		SURFACE/COLOR: /	
MAT NO./REV: /		MAT STATUS: /	
NAME			
ZSF10-48P-1Y-00A(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
/	CUSTOMER DRAWING	/	1:1
		SHEET	1/1

A

B

C

D